


HCL PRESS FOR LIGHTWEIGHT MATERIALS

HCL压力机
用于轻量化材料

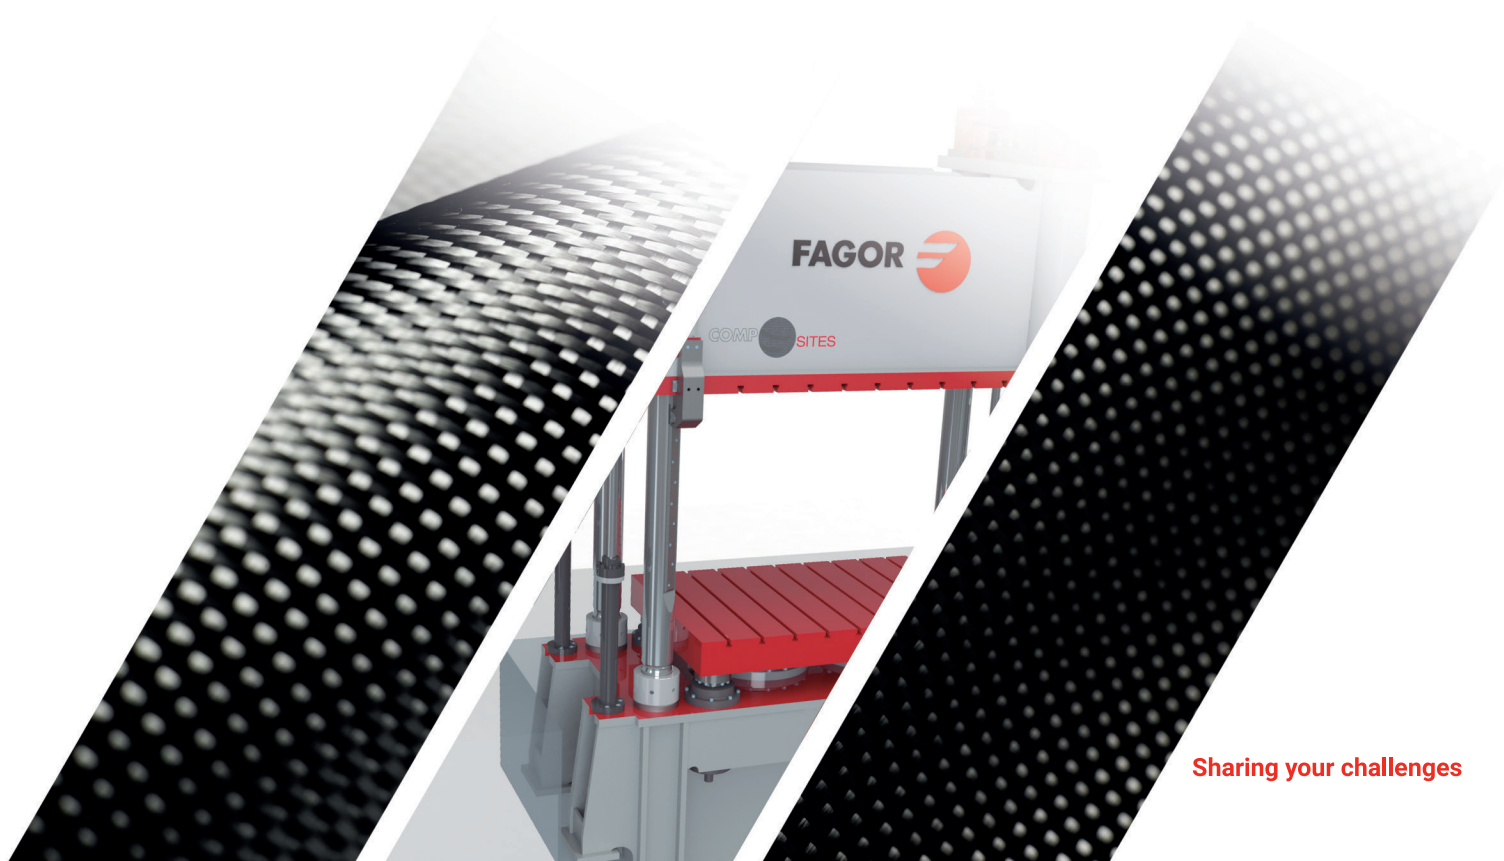

HCL PRESS FOR LIGHTWEIGHT MATERIALS

Hydraulic press for composites forming.
This new concept advantages:

- Rapid Closing Speed of the Slide
- Short Pressure Build up Time of the Forming Cylinders
- Reduced Energy Consumption
- Reduced Height of the Press
- Integrated Parallelism Control
- Bolster Deformation Control



HCL压力机 用于轻量化材料

复合材料成形液压机
新概念优势：

- 滑块快速闭合
- 油缸快速建压
- 能源消耗低
- 压力机高度降低
- 集成平行度控制
- 工作台变形控制

Type	HCL		600	1000	1500	2000	2500	3000	3600
Force									
	Clamp Force	kN	6.000	10.000	15.000	20.000	25.000	30.000	36.000
	合模压力								
Dimensions									
	Bolster Dimensions	mm		2.000 x 1.400	2.400 x 1.600	2.800 x 1.800			
	工作台尺寸	毫米	2.000 x 1.400	2.400 x 1.600	2.800 x 1.800	3.200 x 2.200	3.200 x 2.200	3.200 x 2.200	3.200 x 2.200
			2.400 x 1.600	2.800 x 1.800	3.200 x 2.200	3.600 x 2.400	3.600 x 2.400	3.600 x 2.400	3.600 x 2.400
	Daylight	mm	1.600 (2.000)	2.000 (2.400)	2.400 (2.800)	2.400 (2.800)	2.600 (3.000)	2.600 (3.000)	2.600 (3.000)
	开口尺寸	毫米							
	Opening Stroke	mm	1.000 (1.400)	1.400 (1.800)	1.600 (2.000)	1.600 (2.000)	1.800 (2.200)	1.800 (2.200)	2.000 (2.400)
	行程	毫米							
	Compression Stroke	mm	50 (300)	50 (300)	50 (300)	50 (300)	50 (300)	50 (300)	50 (300)
	压缩行程	毫米							
Speeds									
	Closing Speed	mm/s	400 (1000)	400 (1000)	400 (1000)	400 (1000)	400 (1000)	400 (1000)	400 (1000)
	闭合速度	毫米/秒							
	Pressing	mm/s	1-25 (1-80)	1-25 (1-80)	1-25 (1-80)	1-25 (1-80)	1-25 (1-80)	1-25 (1-80)	1-25 (1-80)
	加压	毫米/秒							
	Opening Speed	mm/s	300 (800)	300 (800)	300 (800)	300 (800)	300 (800)	300 (800)	300 (800)
	开启速度	毫米/秒							

